




## Benchtop Tube Sealer WeldOn-B

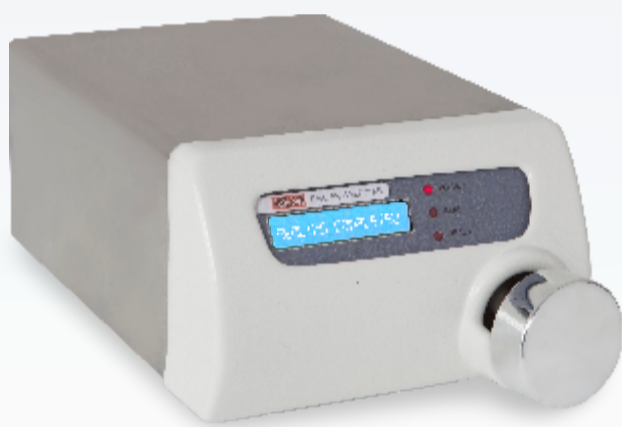

**WeldOn-B**

### Salient Features

- Senses the blood bag tube for automatic sealing process
- Anti-spark and overheat protection system to avoid damage to system & tubing
- Visual LCD Display for :
  - Ready to seal,
  - Sealing in process
  - Sealing Completed
- Easy to remove sealing head cap for quick cleaning
- Seal with clear break line for snap-apart separation
- Splash guard for technician safety

WeldOn-B is a robust benchtop sealer with consistent performance. Ideally suited for blood component separation labs

WeldOn-B helps to keep the blood bag system completely sterile. Ensures quality sealing with clear rupture line for easy tear-apart segments.

Safety features & monitoring system makes it an ideal choice of users.



Seal with clear break line for snap-apart separation

### Technical Specifications

Parameter	WeldOn-B
Dimension (W x D x H) (mm)	220 X 200 X 120
Weight (Kg)	4
RF Frequency	40.68 MHZ
RF Output	100 watt
Seal time	1.5 Sec (auto adjustable)
Sealing Type	Automatic
Input Voltage	230 V, 50/60 Hz



Specifications subject to change without notice



## Tube Sealer WeldOn P



**WeldOn P**

### Salient Features

- Ergonomic handgun ensures easy sealing process by just pressing the lever
- Sealing handgun with compatible RF Cable for extended use
- Anti-spark and overheat protection system to avoid damage to tubing
- Visual indication for
  - Ready to seal
  - Seal process
  - Power supply
- Easy to remove sealing head cap (splash guard) for quick cleaning
- Seal with clear break line for snap-apart separation Consistent seal quality

REMI portable sealer **WeldOn-P** is a battery operated multipurpose sealer. **WeldOn-P** comes with portable sealing gun with long cable for extended reach especially for handling sealing requirements in blood donation room & outdoor camps.

High performance rechargeable battery ensures a capacity for more than 400 seals with single charge.

### Technical Specifications

Parameter	WeldOn P
Dimension (W x D x H) (mm)	185 X 55 X 150 (Handgun) 160 X 50 X 70 (Battery Pack)
Weight (gm)	650 (handgun) & 300 (Battery pack)
RF Frequency	40.68 MHZ
Recharging time	5 hrs.
Seal / Charge	400 seals (with auto adjustable seal time)
Sealing Type	By pressing the lever
Input Voltage	100-240 V, 50/60 Hz



Specifications subject to change without notice